

CTV SoniXs®

5 Headed Electric Compression Unitizer





KEY FEATURES



Up to 220 Loads Per Hour



Up to 5 SoniXs° Sealing Heads



Dual Pawl Platen Support



Up to 8000 Lbs Electric Compression



Standard

20" - 98"



Standard 8" - 96"



Optional Pallet Lance



Optional Turn Table

5 Headed Electric Compression Unitizer

The CTV SoniXs® all-electric compression unitizer features up to five narrow SoniXs® strapping heads. This allows for single platen hits on the widest variety of load sizes in the industry for maximum strap placement flexibility and increased throughput. The CTV SoniXs® also comes with Dual Pawl Platen Support.

Optional "MoscaTrak" diagnostics and data collection screen provides real-time data to determine corrective actions and maximize up-time.


Mosca's proprietary SoniXs® ultrasonic sealing technology creates a reliable, strong seal with increased cycle life, no warm-up required, reduced cleaning, and preventive maintenance.


CTV SoniXs®


5 Headed Electric Compression Unitizer

MODEL	CTV 803	CTV 804	CTV 805
NO. OF STRAPPING HEADS	3	4	5
HEAD SPACING	9" - 9" - 23.5" - 15"		
PRODUCTION RATE (LOADS PER HOUR)	2 x 0 Pattern - Without Lances: 220 With Lances: 170 2 x 2 Pattern - Without Lances: 105 With Lances: 90		
ELECTRICAL	480VAC 3pH, 60 hz, 40 Amps		
CONTROLS	O.E.M. Controls: Allen-Bradley CompactLogix PAC Standard		
CONVEYOR	Dual strand tangential chain drive for consistent load positioning. Heavy duty 2.38″ diameter steel rollers on 3.63″ and 4.25″ centers.		
CONVEYOR SPEED	60 Ft Per Minute (standard) 45 Ft Per Minute (optional)		
COMPRESSION	Electric Compression. Just touch up to 8000 Lbs. 10 settings.		
LOAD DIMENSIONS	Width: 20" - 98" Length: 20" (min) Height Without Lances: 8" - 96" Height With Lances: 12" - 96" Diagonal: 100" max (applies only to optional internal turntable)		
STRAPPING	PET strap: 9mm, 11mm, or 12mm PP strap: 12mm		
STRAP SEAL	SoniXs [®] ultrasonic seal, with DC brushless direct drive motors		
COMMON OPTIONS	 MoscaTrak (performance and maintenance diagnostics tool) Internal Turntable (cross-arm style. Continuous in either direction. Load capacity 2,500 lbs) Lances (PVFA) Feed strap through pallet voids with "clear path" sensing Spare Head/Test Stand 		
ADDITIONAL OPTIONS	 Manual Control Station Extra High Platen Opening End Of Coil Strap Catching and Strap Splicing Device Custom Paint (RAL color chart) 		

Please visit our website for more information about Mosca's SoniXs® technology.



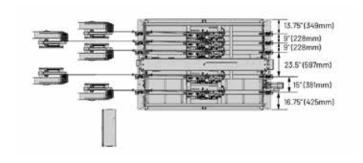

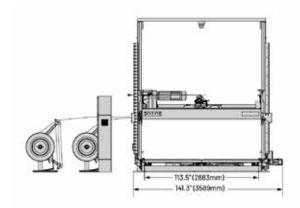

 $\hbox{U.S.A, Latin America and Caribbean:} \\$

EAM-Mosca Corporation

- 675 Jaycee Drive
- Hazle Township, PA 18202 800.456.3420
- 570.459.3426
- **570.455.2442**
- info@eammosca.com

 info@eammosca.com
- www.eammosca.com

Canada:

EAM-Mosca Canada Ltd.

- 170 William Smith Drive Whitby, Ontario, L1N 9N3
- \$800.633.6392 905.665.8225
- 905.665.8188
- ≥ info@eammosca.com
- www.eammosca.com







