
MAX-G SoniXs

REVOLUTIONIZE YOUR END-OF-LINE [PACKAGING] PERFORMANCE



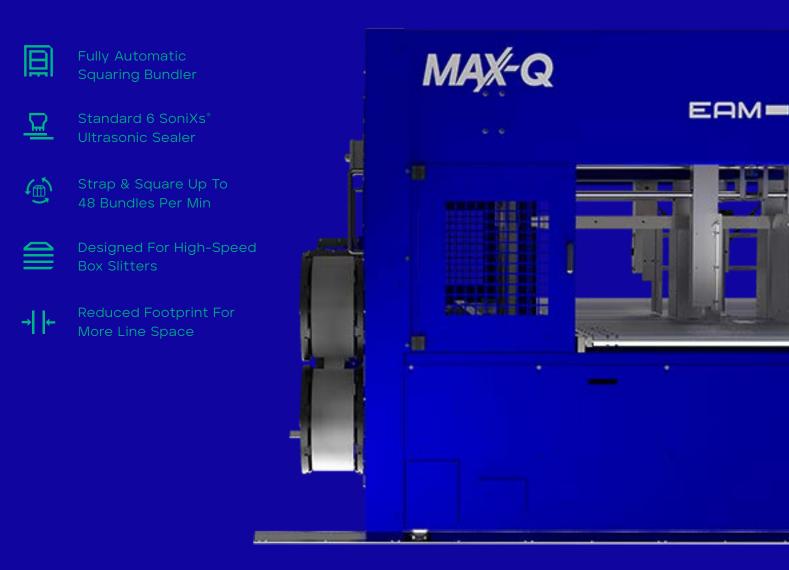

MAX-Q SoniXs

FULLY AUTOMATIC SQUARING BUNDLER FOR HIGH-SPEED BOX SLITTERS

The MAX-Q SoniXs[®] fully enclosed squaring and strapping system simultaneously squares and straps two bundles while keeping them together upon exiting a box slitter, gaining bundle control while also dramatically increasing throughput.

Built on the proven technology found in our SQ4 Tandem System, the MAX-Q SoniXs[®] features two active and one spare TS-6 strapper, a maintenance station to test and perform regular maintenance, and two transfer carts to easily remove and insert strappers into place inside the main chassis.

With its unique curtain conveyor, the system boasts a compact 84.2" line length, a 48% line length reduction, and 74% reduced transit distance of unstrapped bundles compared to the SQ4 Tandem System.

SONI

The Ultimate Strap Sealing Solution

Mosca's proprietary SoniXs[®] ultrasonic sealing heads have revolutionized strapping systems offering significant and proven advantages over traditional heat-seal technologies, including cost, maintenance, and longevity across all industries and applications.

Unlike heat seal systems, SoniXs[®] strap seals are made without the use of high-temperature components, reducing energy costs, improving safety, and generating lower emissions.

A SoniXs[®] seal is harder to break, and the visible evidence of a break is irreversible. The distinctive impression on Mosca's ultrasonically-sealed strap makes it easy to identify if the packaging has been tampered with. The seal will be distinguishably different if a strap is removed and reapplied.

Key Benefits

- + INCREASED SEAL STRENGTH
- + COST SAVINGS
- + LASTING DURABILITY
- + CONSISTENT SEALING
- + WORRY-FREE PRODUCT SECUREMENT

- + ENERGY CONSERVATION
- + LOW MAINTENANCE
- + SEALS BOTH PP AND PET

TECHNICAL SPECIFICATIONS

Production Rate

Simultaneously square and strap up to 48 (24 bundle pairs) per minute

Track Size

1650mm x 600mm (65" x 23 1/2")

Electrical

200 - 575V 50/60 Hz, 1.5 KVA, 3 Ph.

Conveyor

TS-6 Strappers: Extruded splined roller conveyor

Conveyor Speed

Variable 30 - 180 FPM

Conveyor Height

30" - 38.5" (762mm - 978mm)

Strapping Standard: PP - 5mm (other widths available)

Standard. PP - Smith (other widths available)

Strap Tension Infinitely adjustable from 10 - 60 Lbs.

Strap Seal SoniXs[®] ultrasonic seal

Seal Location

Bottom center seal

Machine Shipping Weight Approx. 8000 Lbs. (3629kg)

SPECIAL FEATURES

- + Three TS-6 strappers (two active, one spare)
- Two transfer carts (for easy removal and replacement of TS-6 strappers)
- + Maintenance station (to test and perform regular maintenance)
- + Two dual coil dispensers with auto coil changers
- + Bundle size data transfer via external input
- + Remote support
- + Cat III safety circuit
- + Light tower

_ _ _ _ _ _ _ _ _ _ _

+ Chassis available in any RAL color





MAX-Q main chassis with a TS-6 Strapper pulled out on transfer cart.

TS-6 strapper on transfer cart with maintenance station.

OPTIONS


- + Powered lateral motion
- + Extended floor rails
- + Custom interface(s)
- + Right hand configuration



Want to see the MAX-Q SoniXs^{*} in action? Use the QR code to learn more.

MACHINE DIMENSIONS

BUNDLE SIZE	BOX SLITTER MODE	SINGLE BUNDLE MODE
MIN LENGTH (Direction of travel)	14" (356mm) prior to TBS, 7" (178mm) finished length for center strap placement	7" (178mm) for center strap placement
MAX LENGTH (Direction of travel)	50" (1270mm) prior to TBS, 25" (635mm) finished length for center strap placement	40" (1016mm) for center strap placement
MIN WIDTH (Parallel to strap)	7" (178mm)	
MAX WIDTH (Parallel to strap)	56″ (1423mm) squaring enabled 63″ (1600mm) squaring disabled	

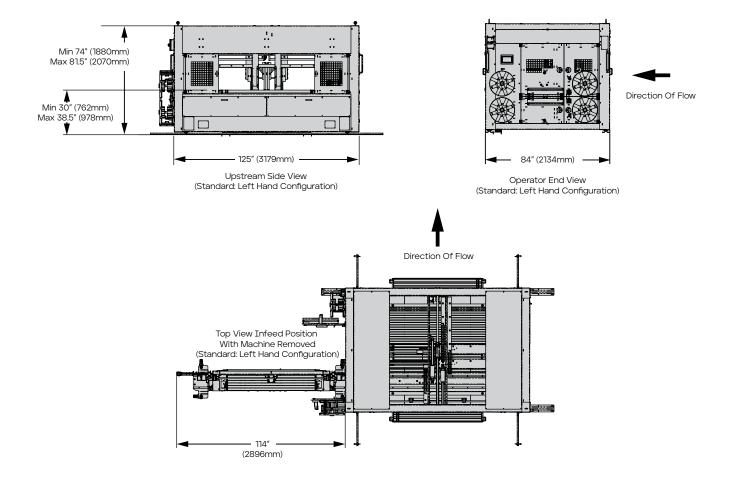

CONTACT US FOR A FREE CONSULTATION TODAY www.eammosca.com | info@eammosca.com

U.S.A., Latin America & The Caribbean

EAM-Mosca Corporation

675 Jaycee Drive, Hazle Township, PA 18202 Phone: 800.456.3420 / 570.459.3426 Fax: 570.455.2442

Canada

EAM-Mosca Canada Ltd.

 170 William Smith Drive, Whitby, Ontario, L1N 9N3

 Phone:
 800.633.6392 / 905.665.8225

 Fax:
 905.665.8188

