

SATURN S6

REVOLUTIONIZE YOUR
END-OF-LINE [PACKAGING]
PERFORMANCE



Automatic Rotary Ring
Stretch Wrapper



High Capacity:
Up To 120 Pallets Per Hour



Machine Options Available



SATURN S6

AUTOMATIC ROTARY RING STRETCH WRAPPING MACHINE

The SATURN S6 is a fully automatic wrapping machine for wrapping palletized loads with stretch film. The film reel is mounted on the ring, which rotates concentrically to the load going up and down depending on the wrapping cycle, so the load remains static.

Designed to cover markets with demanding productions, up to 120 pallets per hour. The ring technology of our SATURN S6 has a more balanced system with less wear and less maintenance than the other technologies available in the wrapping industry.

SCAN
HERE



Want to see
the SATURN S6
in action? Use
the QR code
to learn more.



TECHNICAL SPECIFICATIONS

Production Rate

D17: Up to 120 pallets/hour
D20: Up to 110 pallets/hour
D23: Up to 90 pallets/hour
D26: Up to 85 pallets/hour
D29: Up to 75 pallets/hour

Load Dimensions

D17:	D20:	D23
Max Width 42"	Max Width 50"	Max Width 58"
Max Diagonal 68"	Max Diagonal 80"	Max Diagonal 92"
Max Height 82"*	Max Height 82"*	Max Height 82"*

D26:	D29:
Max Width 70"	Max Width 70"
Max Diagonal 104"	Max Diagonal 116"
Max Height 82"*	Max Height 82"*

*With 19" (500mm) conveyor height.

Electrical

Voltage: 400 V 3P + N + PE 60 Hz .

Air Compression

6 bar

Stretch Wrapping Film:

Max Width: 20"
Max Diameter: 9.8"
Core Diameter: 3"
Film Thickness: 40 - 135 Gauge

Top Film:

Max Height: 63" (D17), 71" (D20), 78" (D23 - D29)
Max Diameter: 10"
Inner Core Diameter: 3"
Film Thickness: 60 - 350 Gauge

SPECIAL FEATURES

- + Guaranteed savings of stretch film: 300% film pre-stretching. 1 m of film becomes 4m.
- + Finishes without tails of film due to our efficient cut and welding device.
- + Electronic and self-adjusting tension control depending on the profile of the load.
- + Option of applying efficient dustproof and rainproof wrappings.
- + Option to wrapping at ground level
- + Capable of applying bands (strips) at any height of the load.

INCLUDED OPTIONS



Quick-Load




Touch Screen

OPTIONS



**Dust-Proof & Rain-Proof
Top Sheet Dispenser**

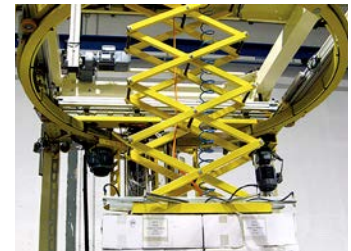

Motorized Hold Down Plate



Roping Device



**EPS: Electronic Pre-Stretch
System**



**ARC: Automatic Reel
Change**




**ACBA: Automatic Corner
Board Application**

MACHINE DIMENSIONS

*Possibility to adapt the frame of the machine for loads higher than 82" (2100mm)

		MACHINERY DIMENSIONS (INCHES)							
		A	B	C	D	E	F	G	H
MACHINE MODEL	D17	276" (7000mm)	79" (2000mm)	118" (3000mm)	79" (2000mm)	142" (3600mm)	165" (4200mm)*	102" (2600mm)*	90" (2300mm)
	D20					150" (3800mm)			98" (2500mm)
	D23	394" (10,000mm)	118" (3000mm)	158" (4000mm)	118" (3000mm)	177" (4500mm)			124" (3150mm)
	D26					193" (4900mm)			136" (3450mm)
	D29								

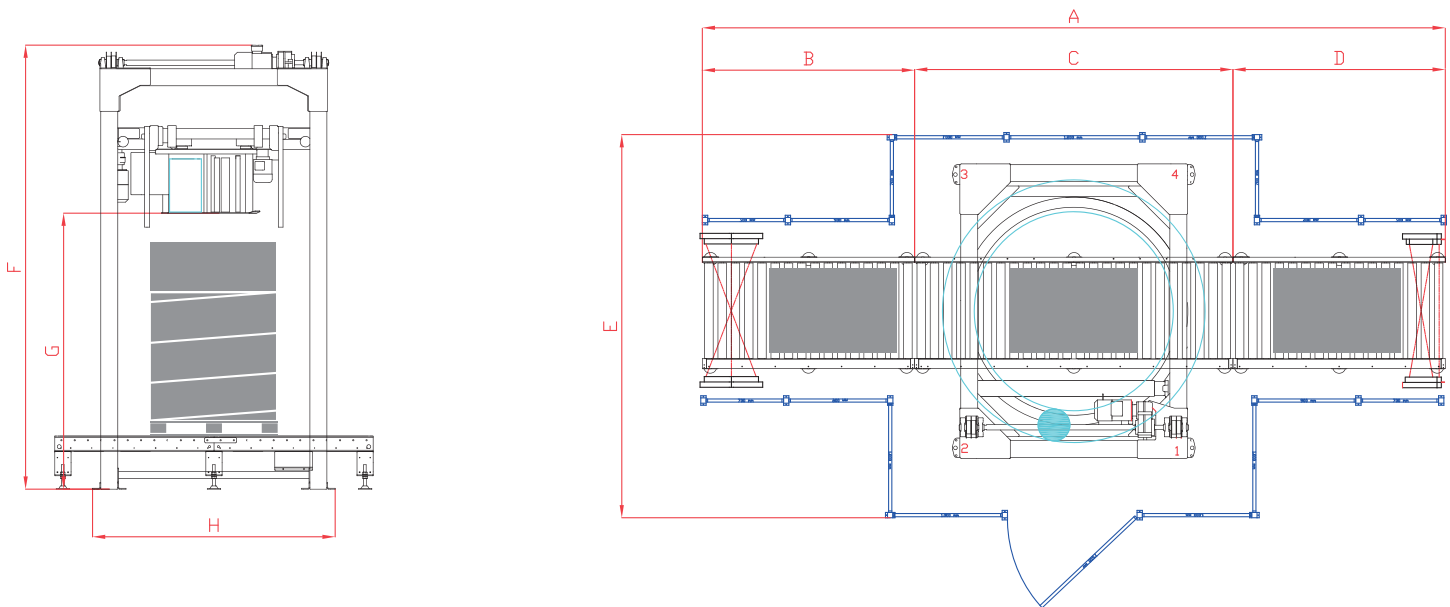

CONTACT US FOR A FREE CONSULTATION TODAY
www.eammosca.com | info@eammosca.com

U.S.A, Latin America & The Caribbean

EAM-Mosca Corporation

675 Jaycee Drive, Hazle Township, PA 18202
 Phone: +1 800.456.3420 / +1 570.459.3426
 Fax: 570.455.2442

Canada

EAM-Mosca Canada Ltd.

170 William Smith Drive, Whitby, Ontario, L1N 9N3
 Phone: +1 800.633.6392 / +1 905.665.8225
 Fax: 905.665.8188