Saturn S8

Automatic rotary ring stretch wrapper





we dare to try anything



Reliable & efficient wrapping machines

- + MAXIMUM CAPACITY: up to 160 pallets/hour
- + Maximum quality, high performance and minimum maintenance
- + Double unwinding head
- + The load remains static: the film reels rotate around the load
- + Guaranteed savings of stretch film: 300% film pre-stretching
- + 1m of film becomes 4 m
- + Finishing without tails of film thanks to our efficient cut and welding device
- + Electronic and self-adjusting tension control depending on the profile of the load
- + Possibility of applying efficient dustproof and rainproff wrappings
- + Possibility of wrapping at ground level
- + Capable of applying bands (strips) at any height of the load

Add-ons




















Saturn S8



		D17	D20	D23	D26	D29
RODUCTION	Maximum capacity (p/h)	160	150	130	125	80
MACHINERY DIMENSIONS	A (inches)	2	76		394	
	B (inches)	7	9	·	118	
	C (inches)	1	18		158	
	D (inches)	7	9		118	
	E (inches)	154	154	177	1	93
	F (inches)			165*		
	G (inches)			102*		
	H (Inches)	90	98	124	31	36
LOAD DIMENSIONS	Maximum width (Inches)	42	50	58	7	0
	Maximum diagonal (inches)	68	80	92	104	116
	Maximum height (inches)	82 (conveyors height 19") *				
POWER SUPPLY	Voltage	400 V 3P + N + PE 50 Hz				
	Compressed air pressure (bar)	6				
STRETCH FILM	Maximum height (inches)		55	0		
	Maximum diameter (Inches)	9,8				
	Inner core diameter (inches)			3		
	Film thickness (gauge)	up to 140				
TOP FILM	Maximum height (inches)	62	70	78	-7	78
	Maximum diameter (inches)		1	1		
	Inner core diameter (inches)			3		
	Film thickness (gauge)		11	20		

^{*} Possibility to adapt the frame of the machine for loads higher than 82"

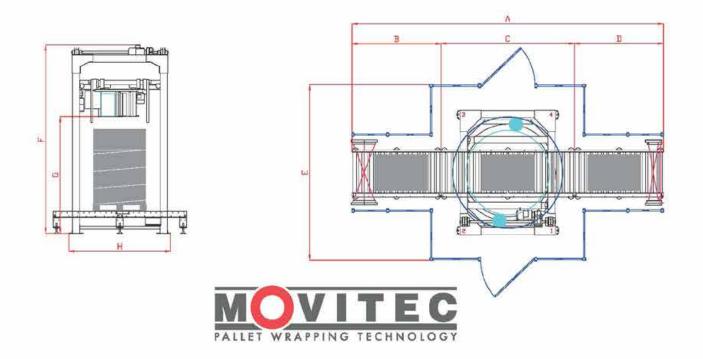





⊗ □ **ⓑ** ♥ www.movitec-ws.com

111 N. Orange Ave. Suite 800 • FL 32801 Orlando (USA) Tel. +1 470 846 9736 • E-mail: sales@movitec-ws.com