

# SATURN S8

REVOLUTIONIZE YOUR  
END-OF-LINE [PACKAGING]  
PERFORMANCE



Automatic Rotary Ring  
Stretch Wrapper



High Capacity:  
Up To 160 Pallets Per Hour



Machine Options Available



# SATURN S8

## AUTOMATIC ROTARY RING STRETCH WRAPPING MACHINE

The SATURN S8 wrapping machine can wrap palletized and unpalletized loads, and is designed to cover markets with high production. Its double unwinding head allows you to apply two turns of film in a single loop, granting a productive capacity of up to 160 pallets per hour, without reducing the efficiency and reliability that characterizes our machines.

SCAN  
HERE



Want to see  
the SATURN S8  
in action? Use  
the QR code  
to learn more.



## TECHNICAL SPECIFICATIONS

### Production Rate

D17: Up to 160 pallets/hour  
 D20: Up to 150 pallets/hour  
 D23: Up to 130 pallets/hour  
 D26: Up to 125 pallets/hour  
 D29: Up to 80 pallets/hour

### Load Dimensions

D17:	D20:	D23
Max Width 42"	Max Width 50"	Max Width 58"
Max Diagonal 68"	Max Diagonal 80"	Max Diagonal 92"
Max Height 82"*	Max Height 82"*	Max Height 82"*

D26:	D29:
Max Width 70"	Max Width 70"
Max Diagonal 104"	Max Diagonal 116"
Max Height 82"*	Max Height 82"*

\*With 19" (500mm) conveyor height.

### Electrical

Voltage: 400 V 3P + N + PE 60 Hz .

### Air Compression

6 bar

### Stretch Wrapping Film:

Max Width: 20", Max Diameter: 9.8", Core Diameter: 3"  
 Film Thickness: 40 - 135 Gauge

### Top Film:

Max Height: 63" (D17), 71" (D20), 78" (D23 - D29)  
 Max Diameter: 10", Inner Core Diameter: 3"  
 Film Thickness: 60 - 350 Gauge

## SPECIAL FEATURES

- + Guaranteed savings of stretch film: 300% film pre-stretching. 1 m of film becomes 4m.
- + Finishes without tails of film due to our efficient cut and welding device.
- + Electronic and self-adjusting tension control depending on the profile of the load.
- + Option of applying efficient dustproof and rainproof wrappings.
- + Option to wrapping at ground level
- + Capable of applying bands (strips) at any height of the load.

## INCLUDED OPTIONS



**Quick-Load**




**Touch Screen**

## OPTIONS



**Dust-Proof & Rain-Proof  
Top Sheet Dispenser**

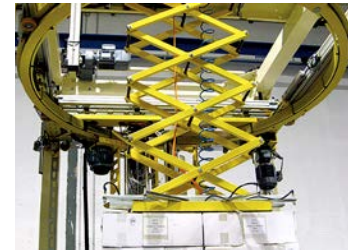

**Motorized Hold Down Plate**



**Roping Device**



**EPS: Electronic Pre-Stretch  
System**



**ARC: Automatic Reel  
Change**





**ACBA: Automatic Corner  
Board Application**

# MACHINE DIMENSIONS

\*Possibility to adapt the frame of the machine for loads higher than 82" (2100mm)

		MACHINERY DIMENSIONS							
		A	B	C	D	E	F	G	H
MACHINE MODEL	D17	276" (7000mm)	79" (2000mm)	118" (3000mm)	79" (2000mm)	142" (3600mm)	165" (4200mm)*	102" (2600mm)*	90" (2300mm)
	D20					150" (3800mm)			98" (2500mm)
	D23	394" (10,000mm)	118" (3000mm)	158" (4000mm)	118" (3000mm)	177" (4500mm)			124" (3150mm)
	D26					193" (4900mm)			136" (3450mm)
	D29								

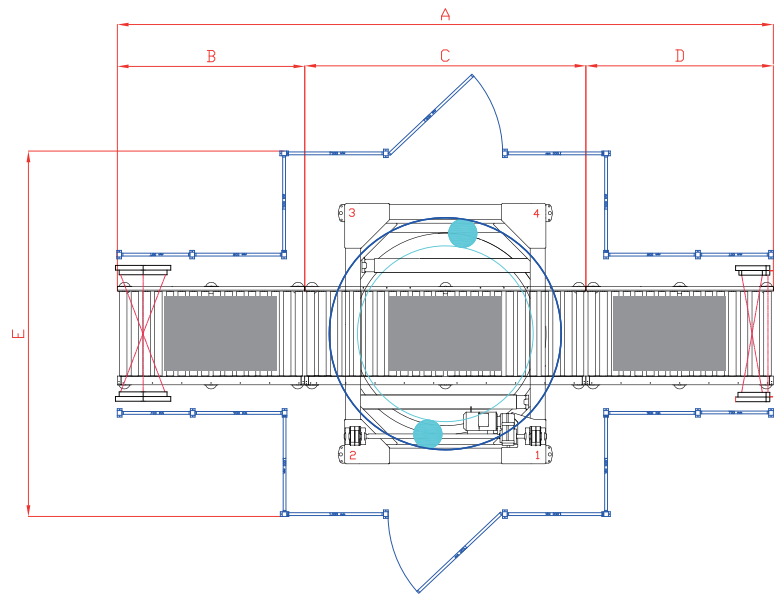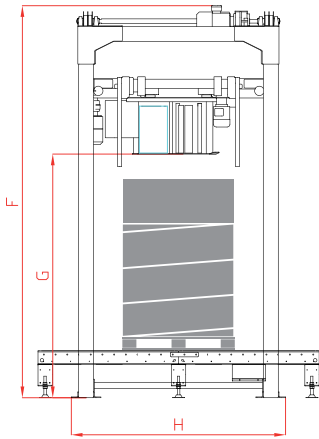

CONTACT US FOR A FREE CONSULTATION TODAY  
[www.eammosca.com](http://www.eammosca.com) | [info@eammosca.com](mailto:info@eammosca.com)

**U.S.A, Latin America & The Caribbean**

**EAM-Mosca Corporation**

675 Jaycee Drive, Hazle Township, PA 18202  
 Phone: +1 800.456.3420 / +1 570.459.3426  
 Fax: 570.455.2442

**Canada**

**EAM-Mosca Canada Ltd.**

170 William Smith Drive, Whitby, Ontario, L1N 9N3  
 Phone: +1 800.633.6392 / +1 905.665.8225  
 Fax: 905.665.8188