

UBS SoniXs®

Strapping Machine



KEY FEATURES









Fully Automatic Standard Sealer Up to 2250mm


Up to 8

Application: Load Secure

The Mosca UBS SoniXs® strapping machine is a high-tension, low profile strapping solution that integrates easily into conveyorized shipping unit packing lines with a minimum 15.25" conveyor gap. The bottom sealing heavy-duty strapping head can be raised easily by a lever for quick maintenance access. Mosca's proprietary SoniXs® ultrasonic sealing technology creates a reliable, strong seal with increased cycle life, no warm up required, reduced cleaning and preventive maintenance.

Strapping Machine

PRODUCTION RATE	Up to 8 cycles per minute
TRACK SIZE	Available widths: 1750mm & 2250mm, Available heights: 650mm - 2900mm (Heights available in 250mm increments)
ELECTRICAL	200-575V, 50/60 hz, 3 ph
CONTROLS	Siemens S7-300 controller with pushbutton operator interface mounted on electrical cabinet. Auto strap positioning via signal exchange with external controller.
CONVEYOR HEIGHT	Up to 12" min.
STRAPPING	SoniXs° sealer runs PP or PET strap 9mm-12mm
STRAP TENSION	Infinitely adjustable up to 450 Lbs.
STRAP SEAL	SoniXs® ultrasonic seal, with DC brushless direct drive motor
SEAL LOCATION	Bottom center seal
MACHINE SHIPPING WEIGHT	Approx. 1000 Lbs.
CASTERS	Fixed Feet

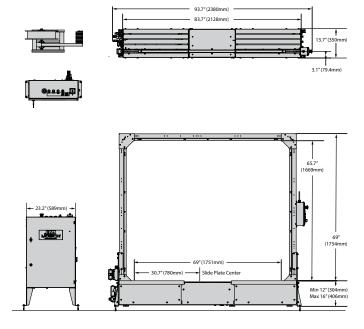

Additional Features

 For easy maintenance the heavy-duty SoniXs° strapping head can be easily raised by a lever.
 Unit lowers and locks by simply pushing down.

Please visit our website for more information about Mosca's SoniXs® technology.

 $\hbox{U.S.A, Latin America and Caribbean:} \\$

EAM-Mosca Corporation

- 675 Jaycee Drive
- Hazle Township, PA 18202
- **6** 800.456.3420 570.459.3426
- **570.455.2442**
- ≥ info@eammosca.com
- www.eammosca.com

Canada:

EAM-Mosca Canada Ltd.

- 170 William Smith Drive Whitby, Ontario, L1N 9N3
- **\$00.633.6392** 905.665.8225
- **9**05.665.8188
- info@eammosca.com
 info@eammosca.com
- www.eammosca.com



