

Saturn S2

Automatic rotary ring stretch wrapper



LOW
CAPACITY
UP TO
45
pallets/hour

THE BEST ALTERNATIVE
TO THE TURNTABLE

MOVITEC
PALLET WRAPPING TECHNOLOGY

we dare to try anything

Saturn S2



- + **LOW CAPACITY: up to 45 pallets/hour**
- + Maximum quality, high performance and minimum maintenance
- + It is the best alternative to the turntable wrapping machine: more balanced, with less mechanical wear and maintenance. The load remains static: the film reels rotate around the load
- + Guaranteed savings of stretch film: 300% film pre-stretching. 1 m of film becomes 4 m

- + Finishing without tails of film thanks to our efficient cut and welding device
- + Electronic and self-adjusting tension control depending on the profile of the load
- + Possibility of applying efficient dustproof and rainproof wrappings
- + Possibility of wrapping at ground level
- + Capable of applying bands (strips) at any height of the load

Technical properties

- + Voltage: 480 V 3P / 60Hz +PE
- + Power supply: 3 kW
- + Compressed air: 6 bar
- + Air consumption: 8 l/cycle
- + Air consumption with top film: 64 l/cycle



STRETCH WRAPPING FILM:

- + Maximum width: 20"
- + Maximum diameter: 9,8"
- + Core diameter: 3"
- + Film thickness: up to 140 (gauge)


LOAD DIMENSIONS:

	D17	D20
Maximum width	43	51
Maximum diagonal	68	80
Maximum height	82*	

*With conveyors height 19".
Possibility to adapt the frame of the machine for loads higher than 82".

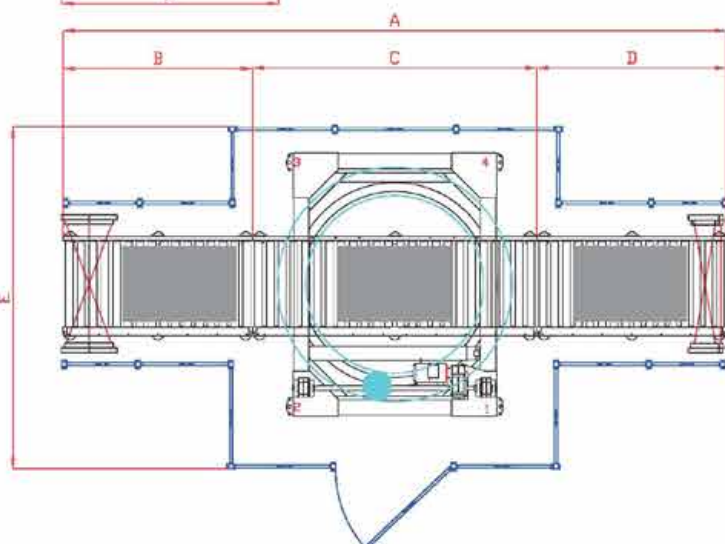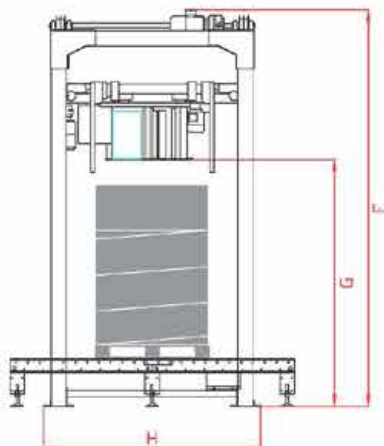

Add-ons

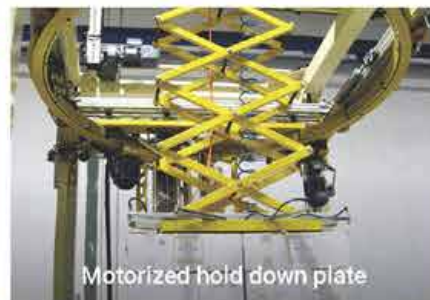

		D17	D20
		50	43
PRODUCTION	Maximum capacity (pallets/hour)		
MACHINERY DIMENSIONS	A (inches)	276	
	B (inches)	79	
	C (inches)	118	
	D (inches)	79	
	E (inches)	142	150
	F (inches)	165	
	G (inches)	102	
	H (inches)	90	98